




PYROBOX5 | Power box with 5 contactors (up to 600V & 600A)

General system layout

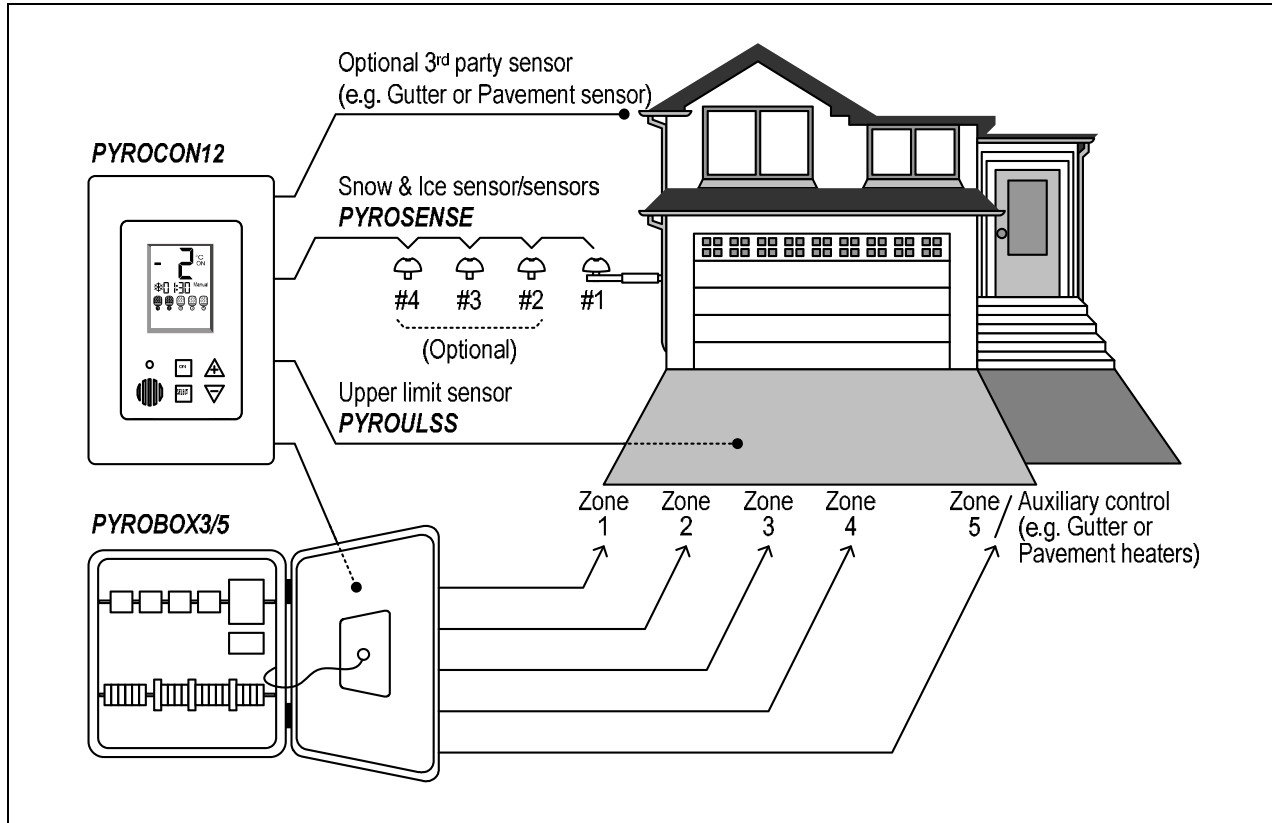

Technical specifications

Approvals	ETL Listed CAN/CSA-C22.2 No. 14 UL-508A	Manual Reset GFS	Push button on Front Panel
Enclosure Protection	IP20, Indoor Mounting	Four Satellite Contactors	600 VACS, 50 A Max (Resistive), 50/60 Hz, 3-Poles
Dimensions	18x18x8 inch (50x50x25 cm)	One Satellite Contactor	277 VAC, 30 A Max (Resistive), 50/60 Hz, 1-Pole 600 VAC / 50 A per pole
Ground Fault Equipment Protection GFS	Adjustable trip current 0.1-1 A (default 0.2A) Adjustable time delay 0.1-1 sec. (default 0.1 sec.)	Terminal blocks	6 mm ² , 10 AWG (max)